

DS-MCW406 Body Camera

Introduction

Body camera highly integrates with record, taping, capture, positioning, etc. It can record the process and condition of events completely via record, taping, and capture. It satisfies the requirement of mobile duty and evidence record. It is widely applicable to public security protection, city management, industry and commerce, etc.

Key Feature

- 2688*1520 2K HD recording.
- Max. 40M(8832*4968) resolution of the captured picture.
- IR function to recognize the facial features in the captured picture even in dim environment.
- Waterproof and dustproof, applicable to all-day field work.



▪ Available Model

DS-MCW406/32G

DS-MCW406/32G/GPS/WIFI




▪ Specification

Camera	
Image Sensor	1/3" CMOS
Max. Resolution	4MP
Day & Night	IR cut filter with auto switch (You can see human face within 3 m at night, You can see human body within 10m at night)
Flashing Light	Supported
Digital Zoom	4X
Video Stabilization	Not Supported
Lens	
FOV	Horizontal: 129° Vertical: 70° Diagonal: 140°
Video	
Video Compression	H.264, H.265
Main Stream	2688*1520@30fps, 1920*1080@30fps, 1280*720@30fps, 720*576@30fps
Audio	
Audio Compression	G.711alaw, G.711ulaw, G.722.1
Audio Bit Rate	8K, 16K
Image	
Image Format	JPEG
Image Resolution	5 M (3072 × 1728), 16 M (5312 × 2988), 30 M (7296 × 4104)、40M(8832*4968)
White Balance	Auto White Balance
Screen	
Screen Size	1.77" TFT
Resolution	128*160
Touchscreen	Not Supported
Storage	
Capacity	32 GB in standard, extendable to 256 GB
Network	
Protocol	Hikvision SDK
Wireless Network	
Bluetooth	Not Supported
Wi-Fi Protocol	802.11 b/g/n (For DS-MCW406/32G/GPS/WIFI only)
Positioning Mode	GPS, Beidou, and mixed positioning (For DS-MCW406/32G/GPS/WIFI only)
Interface	
USB	1, USB TYPE-C
Indicator	Charging indicator, Working indicator
Button	On/off, Capture, Record, Tape, Up,Down,Menu,Enter
MIC	Supported
Speaker	Supported
General	
Model	DS-MCW406

Ingress Protection	IP54
Operating System	Linux
Operating Condition	-20°C ~ 55°C (-4 °F to 131 °F)
Working Humidity	≤ 90%
Weight	125g(without shoulder clip) (0.27lb)
Battery	
Capacity	2,500 mAh
Endurance	8h@2K recording, 12h @1080P recording, 14h@720P recording
Charging Time	≤4h



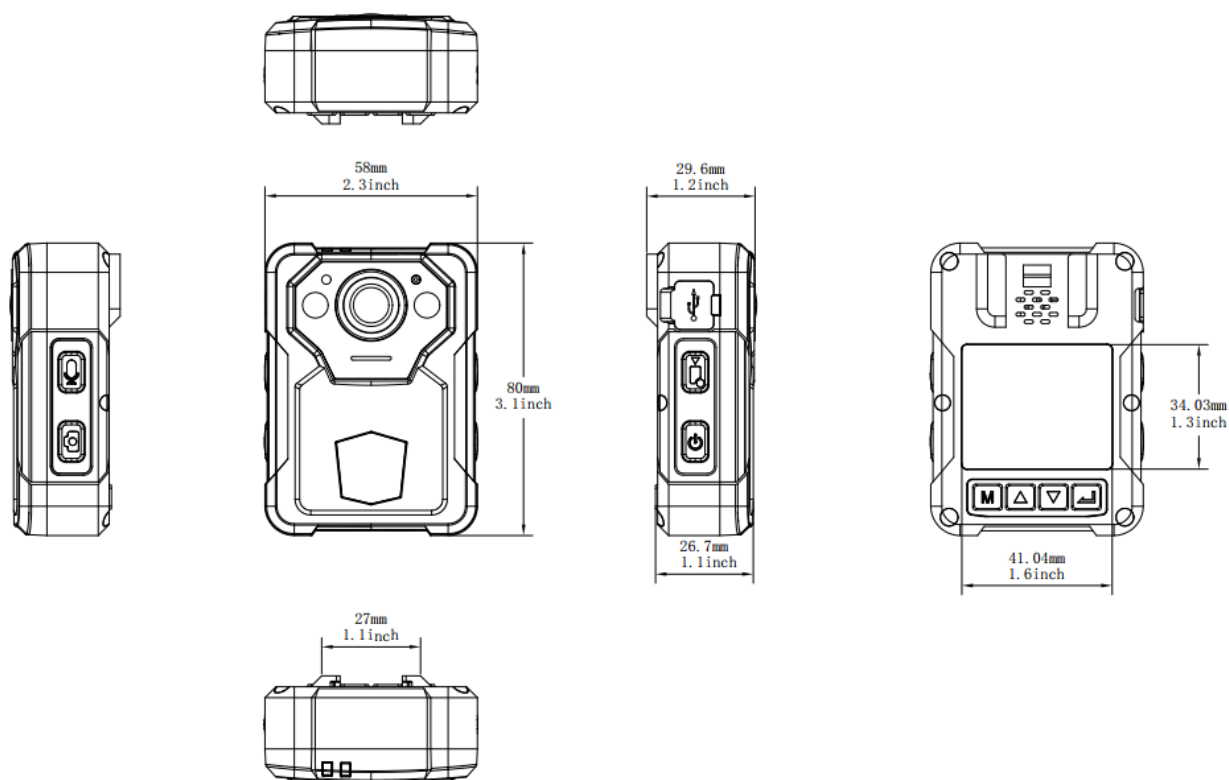

Distributed by

HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com