


XF-18AWG 2C SOLID FPLR

18AWG 2/C SOL FPLR



- Model:UL Solid U
- Categories:Fire Alarm Cable
- Certificates:ETL, CE,CPR, RoHS
- Length:100m,500m,500ft,1000ft
- Packing:roll, wooden spool, carton, pallet
- MOQ:10KM
- Delivery time:Normally 15 working days
- Port of Loading:NINGBO, SHANGHAI
- Term of payment:T/T, L/C at sight, D/P at sight

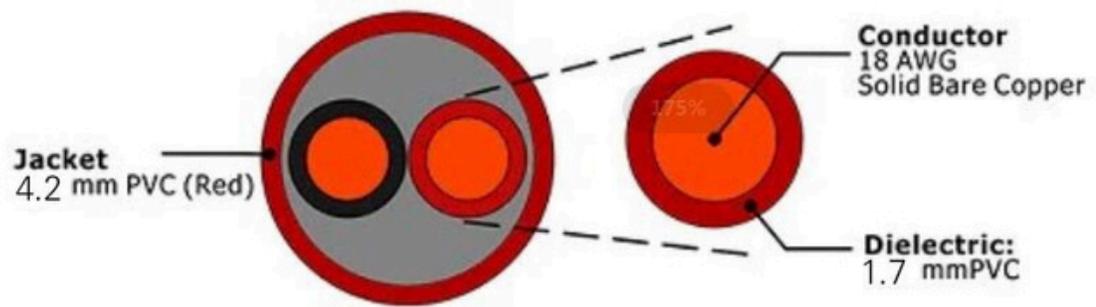

Cable construction

Conductor:		18AWG Solid Bare Copper
Nom.Dia:		0.04"(1.02mm)
Dielectric:	Type:	FPLR-PVC 0.067±0.004"nom.(1.7±0.10mm)
	Dia.over Dielectric:	
Color Code:	1.black 2.Red	
Jacket:	Type:	FPLR-PVC
	Color:	Red
	Dia.over Jacket:	0.165"±0.004"(4.20±0.1mm)

Electrical Properties :

Temperature Rating	-20°C ~ +60°C
Operating Voltage	300 Volts max
Capacitance	20 pf/ft nom
Impedance	81 Ohms nom
DC Resistance	6.5 Ohms/M' at 20°C

Order Information:

Package	100M/Reel,200M/Reel,500M/Wooden Spool
Delivery time	Normally 15 days after received the deposit.