


XF-18AWG 2C SOL Shielded FPLR

18AWG 2/C SOL Shielded FPLR



- Model:UL Solid U
- Categories:Fire Alarm Cable
- Certificates:ETL, CE,CPR, RoHS
- Length:100m,500m,500ft,1000ft
- Packing:roll, wooden spool, carton, pallet
- MOQ:10KM
- Delivery time:Normally 15 working days
- Port of Loading:NINGBO, SHANGHAI
- Term of payment:T/T, L/C at sight, D/P at sight

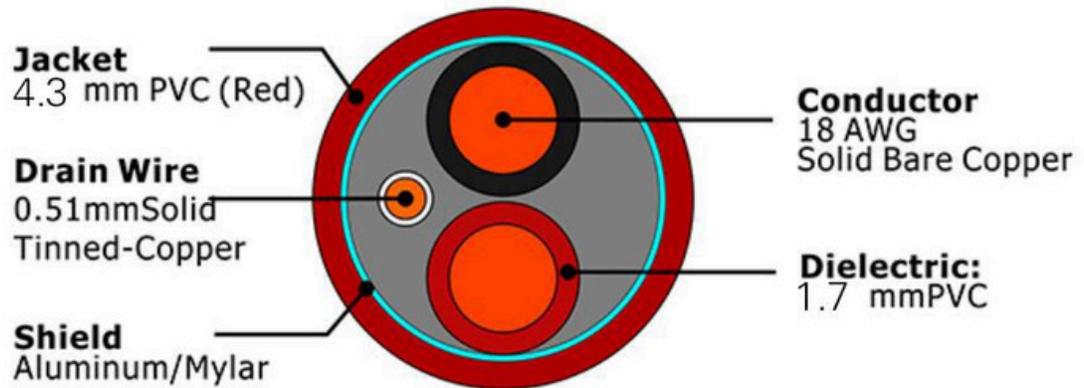

Cable construction

Conductor:

Nom.Dia:	18 AWG Solid Bare Copper	
	0.04"(1.02mm)	
Dielectric:	Type:	FPLR-PVC
	Dia.over Dielectric:	0.067±0.004"nom.(1.7mm±0.10mm)
Drain Wire:	0.51mm Solid Tinned-Copper	
Shield :	0.001"(0.025mm) thick Aluminum/Mylar	
Color Code:	1.black 2.Red	
Jacket:	Type:	FPLR-PVC
	Color:	Red
	Dia.over Jacket:	0.169"±0.006"(3.75±0.15mm)

Electrical Properties :

Temperature Rating	-20°C ~+75°C
Operating Voltage	300 Volts max
Capacitance	42 pf/ft nom
Impedance	36 Ohms nom
DC Resistance	6.5 Ohms/M' at 20°C

Order Information:

Package	100M/Reel,200M/Reel,500M/Wooden Spool
Delivery time	Normally 15 working days after received the deposit.