



VC1250 (12V5Ah)

VCONN Standard battery is design for a general purpose by VCONN Power. VC1250 is a general purpose battery up to 5 years in star service. As with all VCONN batteries, all are rechargeable highly efficient, leak proof and maintenance free.



ISO 9001:2008 Standard




ISO 14001:2004 Standard



Specifications:

Cells per Unit	6
Normal Voltage	12V
Capacity	5Ah@20hr-rate to 1.75V per cell@25°C
Weight	Approx.(1.59±3%)kg
Maximum Discharge Current	50A(5sec)
Internal Resistance	Approx. 36mΩ full charged @25°C
Operating Temperature Range	Discharge: -15°C~50°C Charge: -15°C~40°C Storage: -15°C~40°C
Nominal Operating Temperature Range	25°C±3°C
Float Charging Voltage	13.6~13.8VDC/unit Average @25°C
Maximum Charging Current	1.50A
Equalization and Cycle Service	14.4V~15.0VDC/unit Average @ 25°C
Self Discharge	KAIYING Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	F1(0.187)/F2(0.250)
Container Material	ABS(UL94-HB) *Flammability resistance of (UL94-V0) can be available upon request

Dimensions: L90*W 70*H101(TH107)

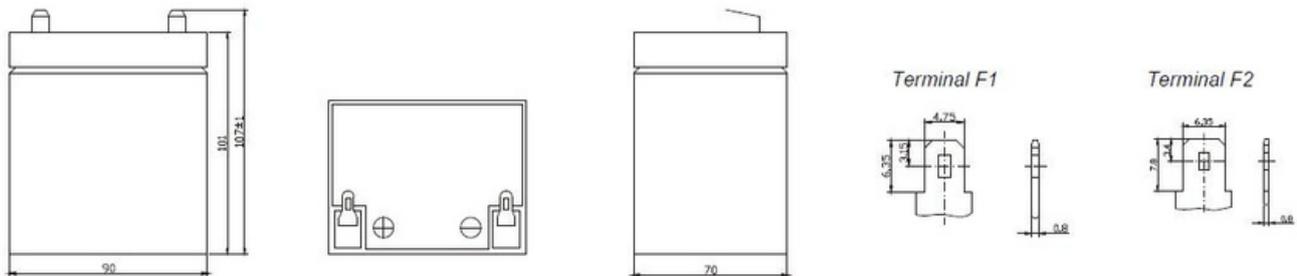


Constant Current Discharge Characteristics (A, 25°C)

F.V/TIME	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60	17.1	10.8	8.55	4.95	2.93	1.60	1.14	0.78	0.50	0.42	0.23
9.90	16.6	10.5	8.34	4.83	2.85	1.59	1.14	0.77	0.50	0.42	0.23
10.2	16.2	10.3	8.21	4.75	2.81	1.58	1.13	0.77	0.49	0.42	0.23
10.5	15.7	9.94	7.95	4.60	2.72	1.56	1.11	0.76	0.50	0.42	0.23
10.8	15.3	9.64	7.80	4.51	2.67	1.54	1.10	0.75	0.49	0.41	0.23


Constant Power Discharge Characteristics (Watt, 25°C)

F.V/TIME	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60	186	122	97.5	56.7	33.9	18.7	13.6	9.27	5.97	5.04	2.74
9.90	185	118	95.0	55.3	33.0	18.6	13.5	9.23	5.98	5.05	2.74
10.2	181	116	93.6	54.5	32.5	18.4	13.4	9.13	5.92	5.00	2.72
10.5	176	112	90.6	52.8	31.5	18.2	13.2	9.04	5.94	4.98	2.71
10.8	170	109	88.9	51.7	30.9	18.1	13.1	8.95	5.88	4.97	2.70


Float Service Life

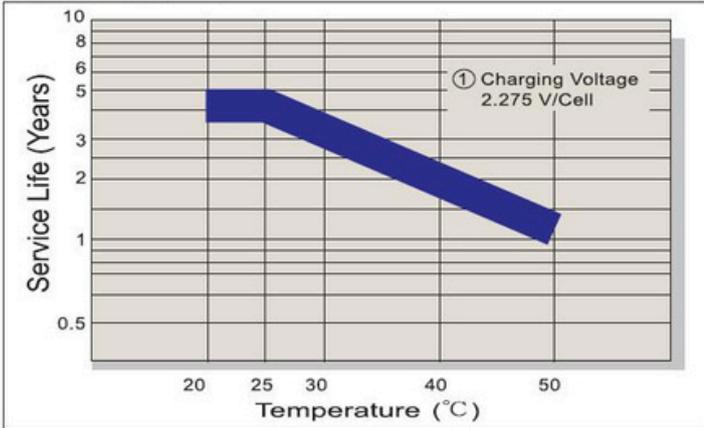


Capacity Retention Characteristic

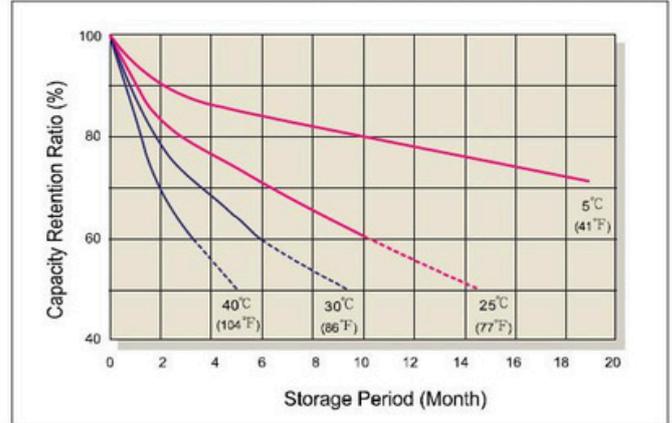


Battery Voltage and Charge Time for Standby use

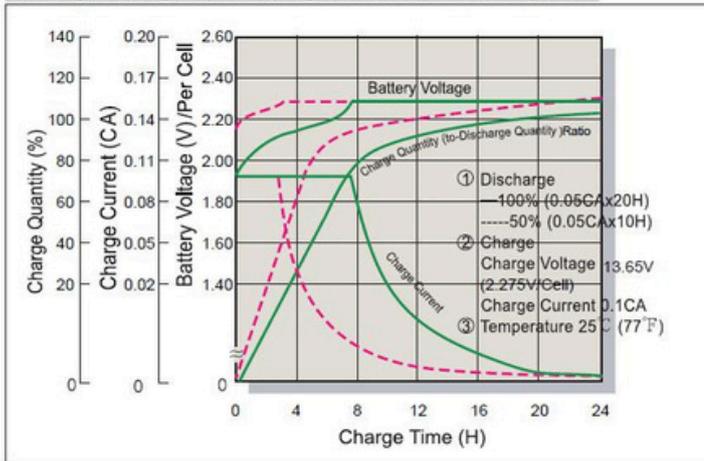


Cycle Service Life

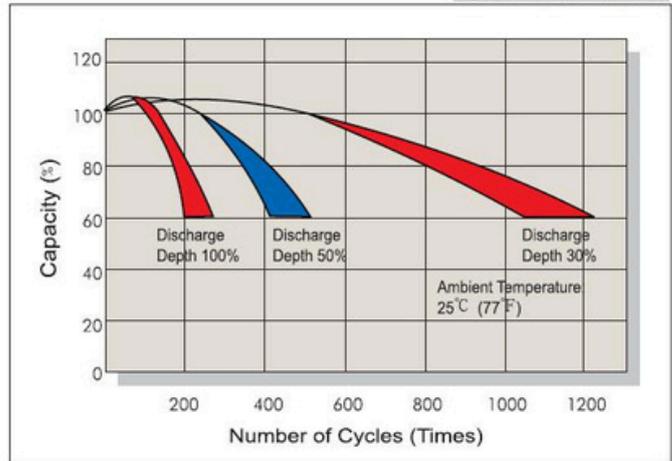

Battery Voltage and Charge Time for Cycle Use

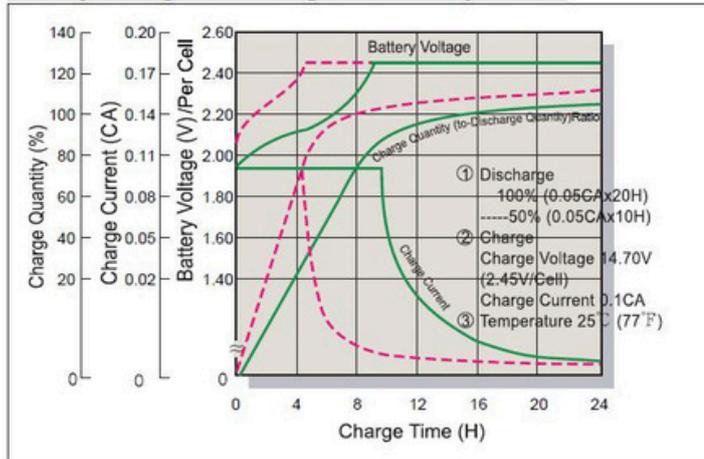

Terminal Voltage (V) and Discharge Time

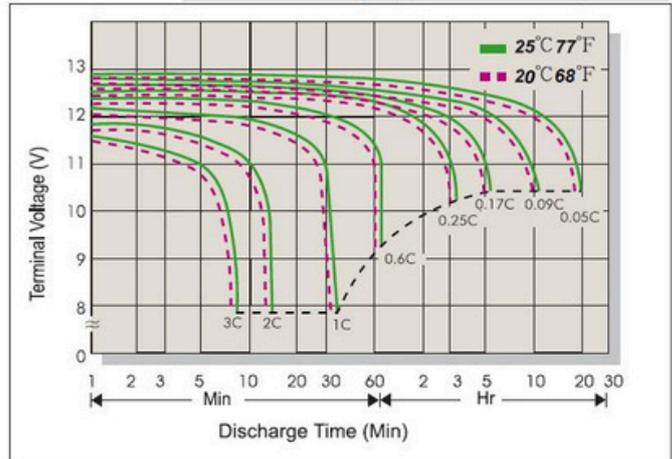

Charging Procedures

Application	Charge Voltage(V/cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C(77°F)	2.45	2.40~2.50	0.3C
Standby	25°C(77°F)	2.275	2.25~2.30	

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75	1.70	1.65	1.60
Discharge Current (A)	0.2C > (A)	0.2C < (A)	0.5C < (A)	(A) > 1.0C