



# VC1290 (12V9Ah)

VCONN Standard battery is design for a general purpose by VCONN Power. 6FM9 is a general purpose battery up to 5 years in star service. As with all VCONN batteries, all are rechargeable highly efficient, leakproof and maintenance free.

### Specifications:

Cells per Unit	6
Normal Voltage	12V
Capacity	9Ah@20hr-rate to 1.75V per cell@25°C
Weight	Approx.(2.47±3%)kg
Maximum Discharge Current	90A(5sec)
Internal Resistance	Approx. 17mΩ full charged @25°C
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Nominal Operating Temperature Range	25°C±3°C
Float Charging Voltage	13.6~13.8VDC/unit Average @25°C
Maximum Charging Current	2.7A
Equalization and Cycle Service	14.4V~15.0VDC/unit Average @ 25°C
Self Discharge	KAIYING Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	F1(0.187)/F2(0.250)
Container Material	ABS(UL94-HB) *Flammability resistance of (UL94-V0) can be available upon request




ISO 9001:2008 Standard



ISO 14001:2004 Standard



### Dimensions: L151\*W 65\*H94(TH100)

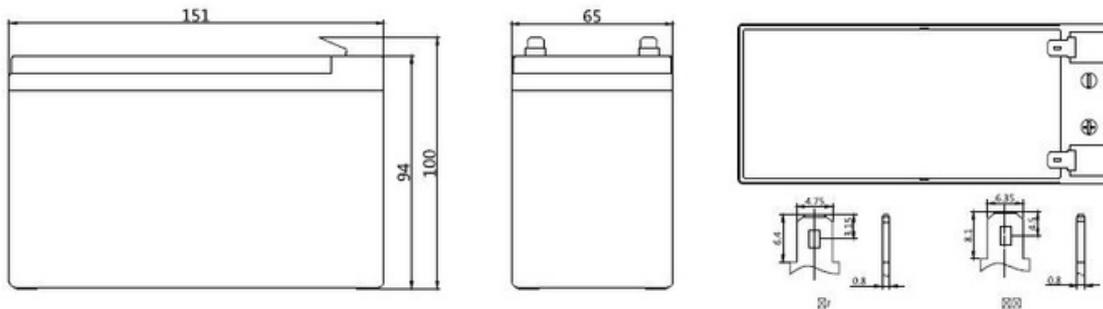


### Constant Current Discharge Characteristics (A, 25°C)

F.V/TIME	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60	34.2	26.1	20.7	11.5	5.94	3.24	2.33	1.60	1.00	0.85	0.46
9.90	33.2	25.3	20.2	11.2	5.79	3.23	2.32	1.59	1.00	0.85	0.46
10.2	32.5	24.8	19.9	11.0	5.70	3.20	2.30	1.58	0.99	0.84	0.45
10.5	31.5	24.0	19.3	10.7	5.52	3.16	2.27	1.56	0.99	0.84	0.45
10.8	30.5	23.3	18.9	10.5	5.42	3.13	2.25	1.54	0.99	0.84	0.45


### Constant Power Discharge Characteristics (Watt, 25°C)

F.V/TIME	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60	382	294	232	132	68.8	37.9	27.7	19.1	12.0	10.2	5.48
9.90	370	286	226	128	67.1	37.8	27.5	19.0	12.0	10.2	5.49
10.2	363	280	223	126	66.0	37.4	27.3	18.8	11.9	10.1	5.43
10.5	351	271	216	122	64.0	37.0	27.0	18.6	11.9	10.1	5.42
10.8	341	263	212	120	62.7	36.6	26.7	18.4	11.8	10.0	5.40


**Float Service Life**

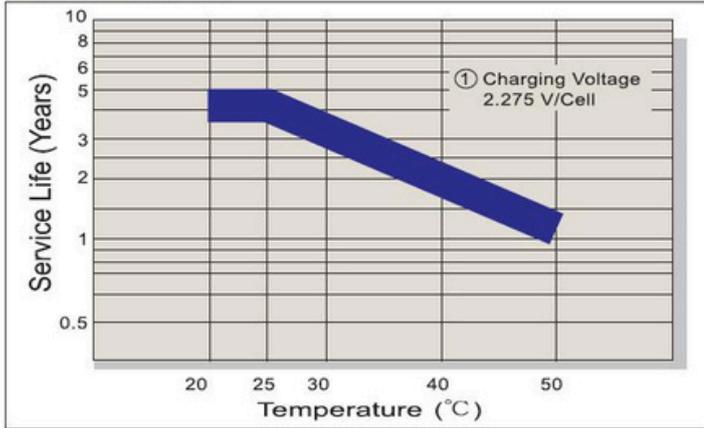


**Capacity Retention Characteristic**

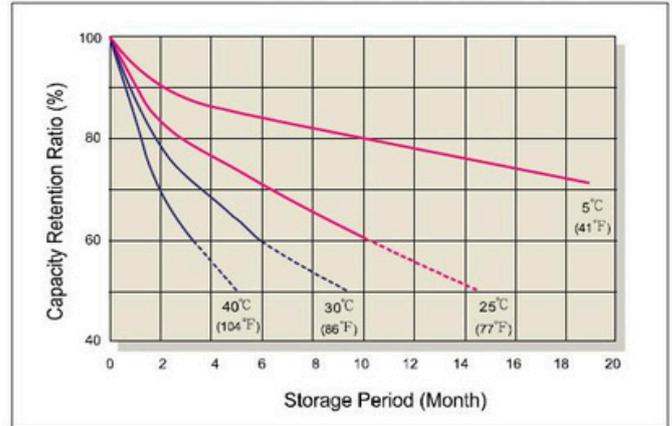


**Battery Voltage and Charge Time for Standby use**

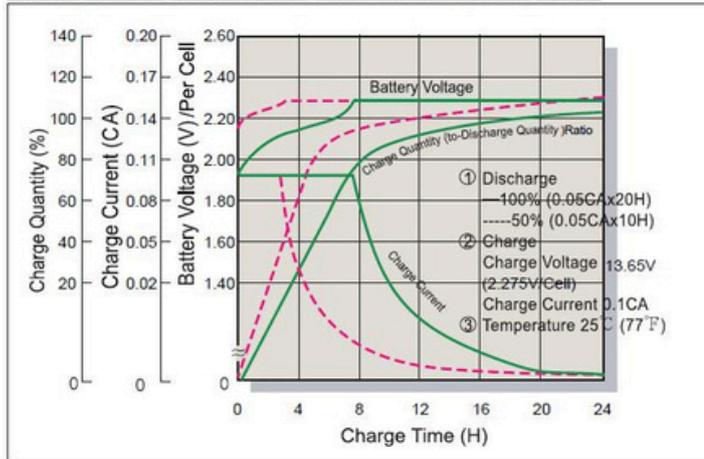


**Cycle Service Life**

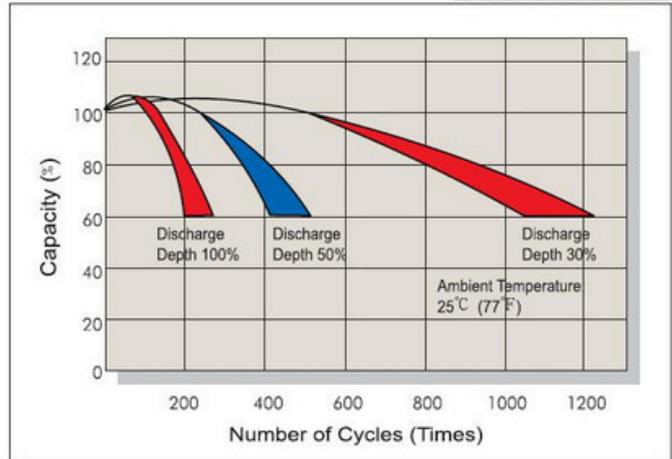

**Battery Voltage and Charge Time for Cycle Use**

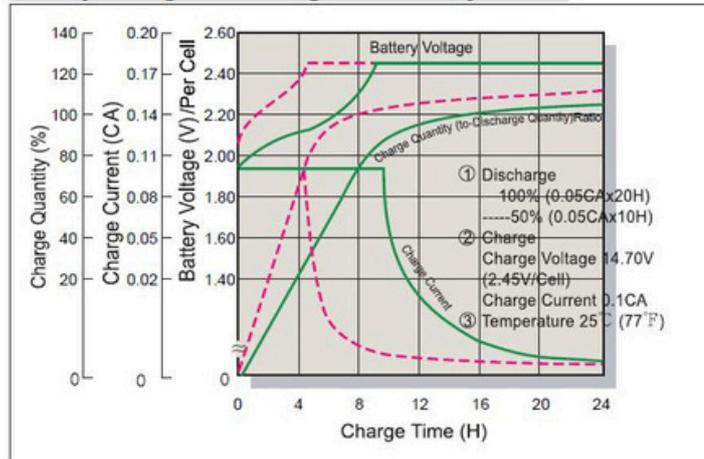

**Terminal Voltage (V) and Discharge Time**

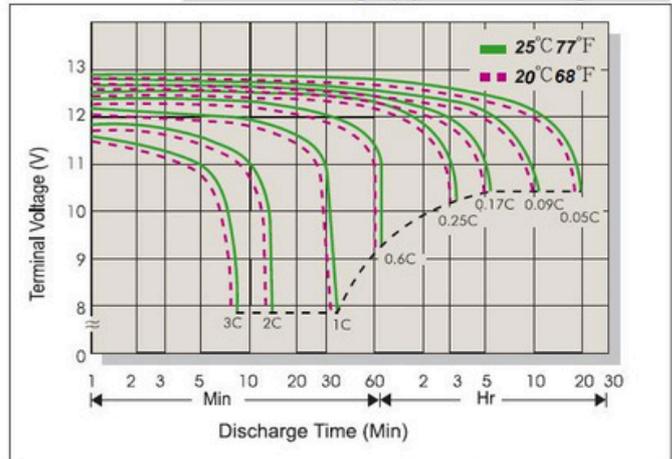

**Charging Procedures**

Application	Charge Voltage(V/cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C(77°F)	2.45	2.40~2.50	0.3C
Standby	25°C(77°F)	2.275	2.25~2.30	

**Discharge Current VS. Discharge Voltage**

Final Discharge Voltage V/cell	1.75	1.70	1.65	1.60
Discharge Current (A)	0.2C>(A)	0.2C<(A)	0.5C<(A)	(A)>1.0C
		<0.5C	<1.0C	