


KYROSS 1.10

FICHA TÉCNICA

Cuadro	<i>Hmc-7 carbon frame thruaxle boost, BB pressfit 12x148 mm boost dual fit frame</i>
Horquilla	<i>Suntour XCM 32 travel 100 mm boost ta, 15x110 mm</i>
Potencia	<i>Nautilus alloy ext 60 mm</i>
Manillar	<i>Nautilus alloy, flat 740 mm</i>
Sillín	<i>Selle italia X3</i>
Tubo de asiento	<i>Nautilus alloy L 350 mm</i>
Freno delantero	<i>Shimano MT 200, hydraulic disc brake W/ 160 mm rotor</i>
Freno trasero	<i>Shimano MT 200, hydraulic disc brake W/ 160 mm rotor</i>
Shifter	<i>Shimano deore 1x10 speed M6000</i>
Desviador trasero	<i>Shimano deore 10 speed M6000</i>
Cassette	<i>11-42t</i>
Bielas	<i>Narrow wide 34t chainring W/ 170 mm alloy crank</i>
Pedalier	<i>Pressfit BB hollowtech II</i>
Cadena	<i>Kmc x10R</i>
Cámara	<i>Maxxis F/V tubes</i>
Llantas	<i>Nautilus alloy double wall</i>
Maza delantera	<i>Nautilus bearing hub W/ 15 mm thru-axle, 110 mm spacing</i>
Maza trasera	<i>Nautilus bearing hub W/ 12 mm thru-axle, 148 mm spacing</i>
Neumáticos	<i>Maxxis ardent 2 size tire, 27,5"x2,25" & 29"x2,25"</i>
Peso sin pedales	<i>11,68 kg</i>

*Las especificaciones están sujetas a cambios sin previo aviso

KYROSS 1.10

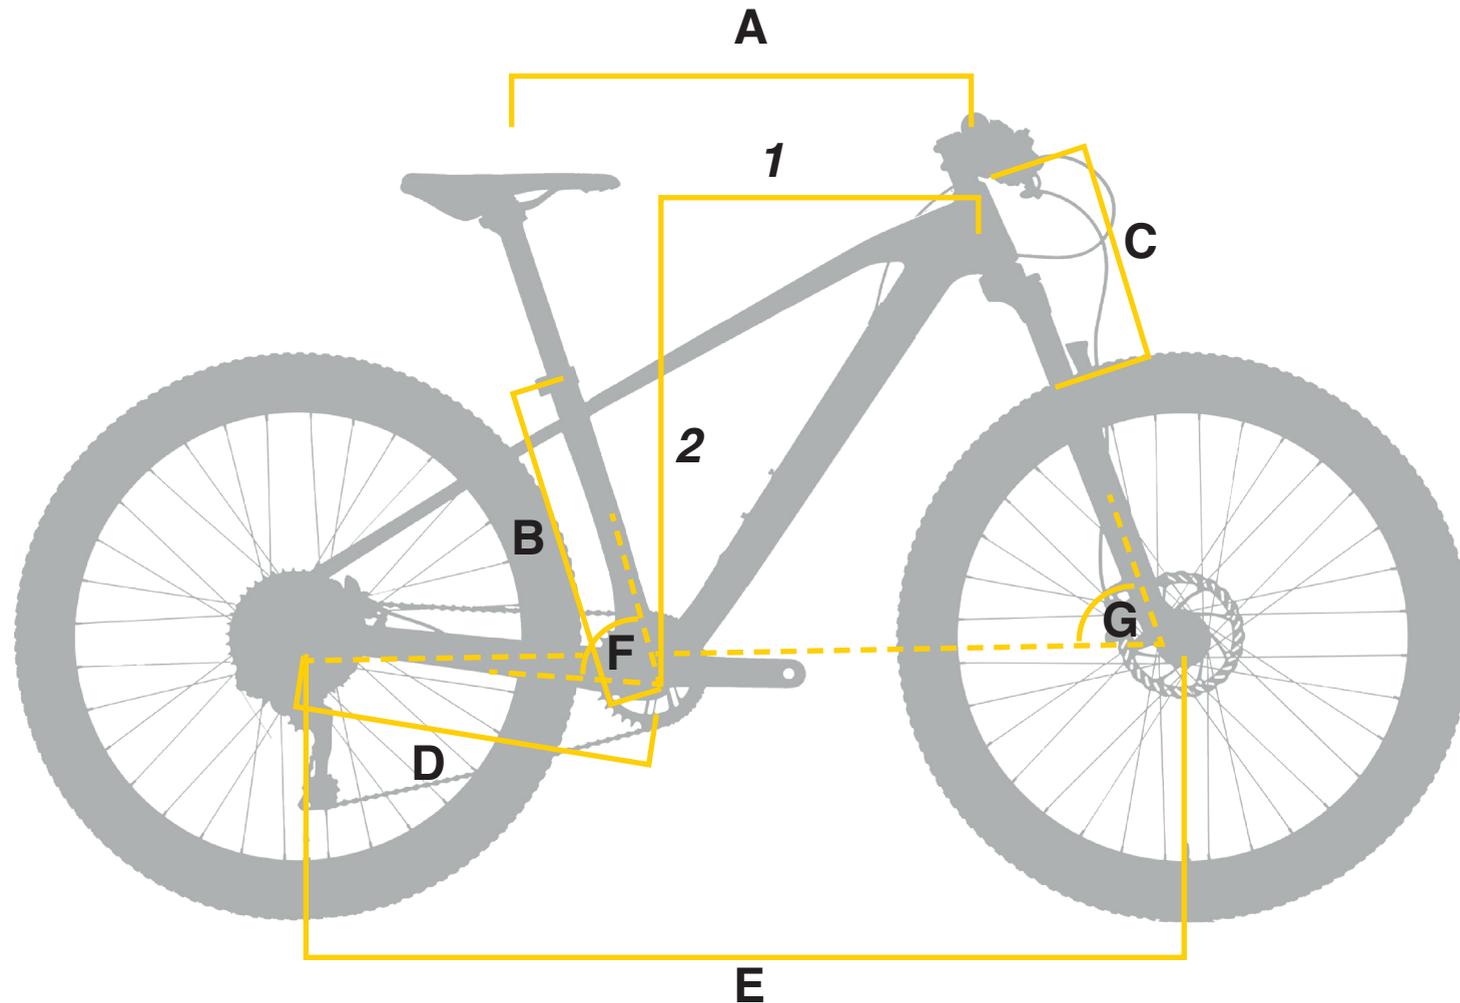

27,5"

	S	M
1 REACH	400	430
2 STACK	430	684
A EFFECTIVE TOP TUBE	581	600
B SEAT TUBE LENGHT	390	440
C HEAD TUBE LENGHT	100	100
D CHAINSTAY LENGHT	427	427
E WHEELBASE	1070	1090
F SEAT ANGLE	73	73
G HEAD ANGLE	69,5	69,5

29"

	S	M
1 REACH	390	418
2 STACK	608	610
A EFFECTIVE TOP TUBE	557	581
B SEAT TUBE LENGHT	325	440
C HEAD TUBE LENGHT	105	105
D CHAINSTAY LENGHT	440	440
E WHEELBASE	1075	1095
F SEAT ANGLE	74,5	74,5
G HEAD ANGLE	69,5	69,5

KYROSS 1.10

SIZE CHART (RECOMMENDATION)

27,5"

S

M

Height (Cm)

153-167

167-177

Inseam
Length (Cm)

71-77

77-82

29"

S

M

153-168

168-179

73-78

78-83