


Vitessa 2.00

Cuadro	<i>Alloy Hydroforming 700 c</i>
Horquilla	<i>Full Carbon Fork Oversize</i>
Potencia	<i>Alloy Bar Bore 31,8 mm</i>
Manillar	<i>Alloy XS & S= 400, M & L= 420 mm, Drop Bar 124 mm</i>
Sillín	<i>United Strace Thor</i>
Tubo de Asiento	<i>Alloy Od 27,2 mm X 350 mm</i>
Freno Delantero	<i>Shimano Tiagra Caliper Brake</i>
Freno Trasero	<i>Shimano Tiagra Caliper Brake</i>
Desviador Delantero	<i>Shimano Tiagra R4700 (2 Speed)</i>
Shifter	<i>Shimano Tiagra St-R4700 W/ Brake Lever R/l 2 X 10 Speed</i>
Desviador Trasero	<i>Shimano Tiagra R4700 (10 Speed)</i>
Cassette	<i>12-25 t</i>
Bielas	<i>Shimano Tiagra R4700, 170 mm</i>
Platos	<i>Shimano Tiagra R4700 52/36t</i>
Pedalier	<i>Shimano Bb Part</i>
Cadena	<i>Kmc X10r</i>
Cámara	<i>Kenda</i>
Llantas	<i>Alloy Rim H: 30 mm Double Wall</i>
Maza Delantera	<i>Bearing Hub W/ 15 mm Quick Release, 100 mm spacing</i>
Maza Trasera	<i>Bearing Hub W/ 10 mm Quick Release, 135 mm spacing</i>
Neumáticos	<i>Kenda K152 60 Tpi, 700c X 25c</i>
Peso Sin Pedales	<i>9,6 Kg</i>

*Las especificaciones están sujetas a cambios sin previo aviso

Vitesse 2.00

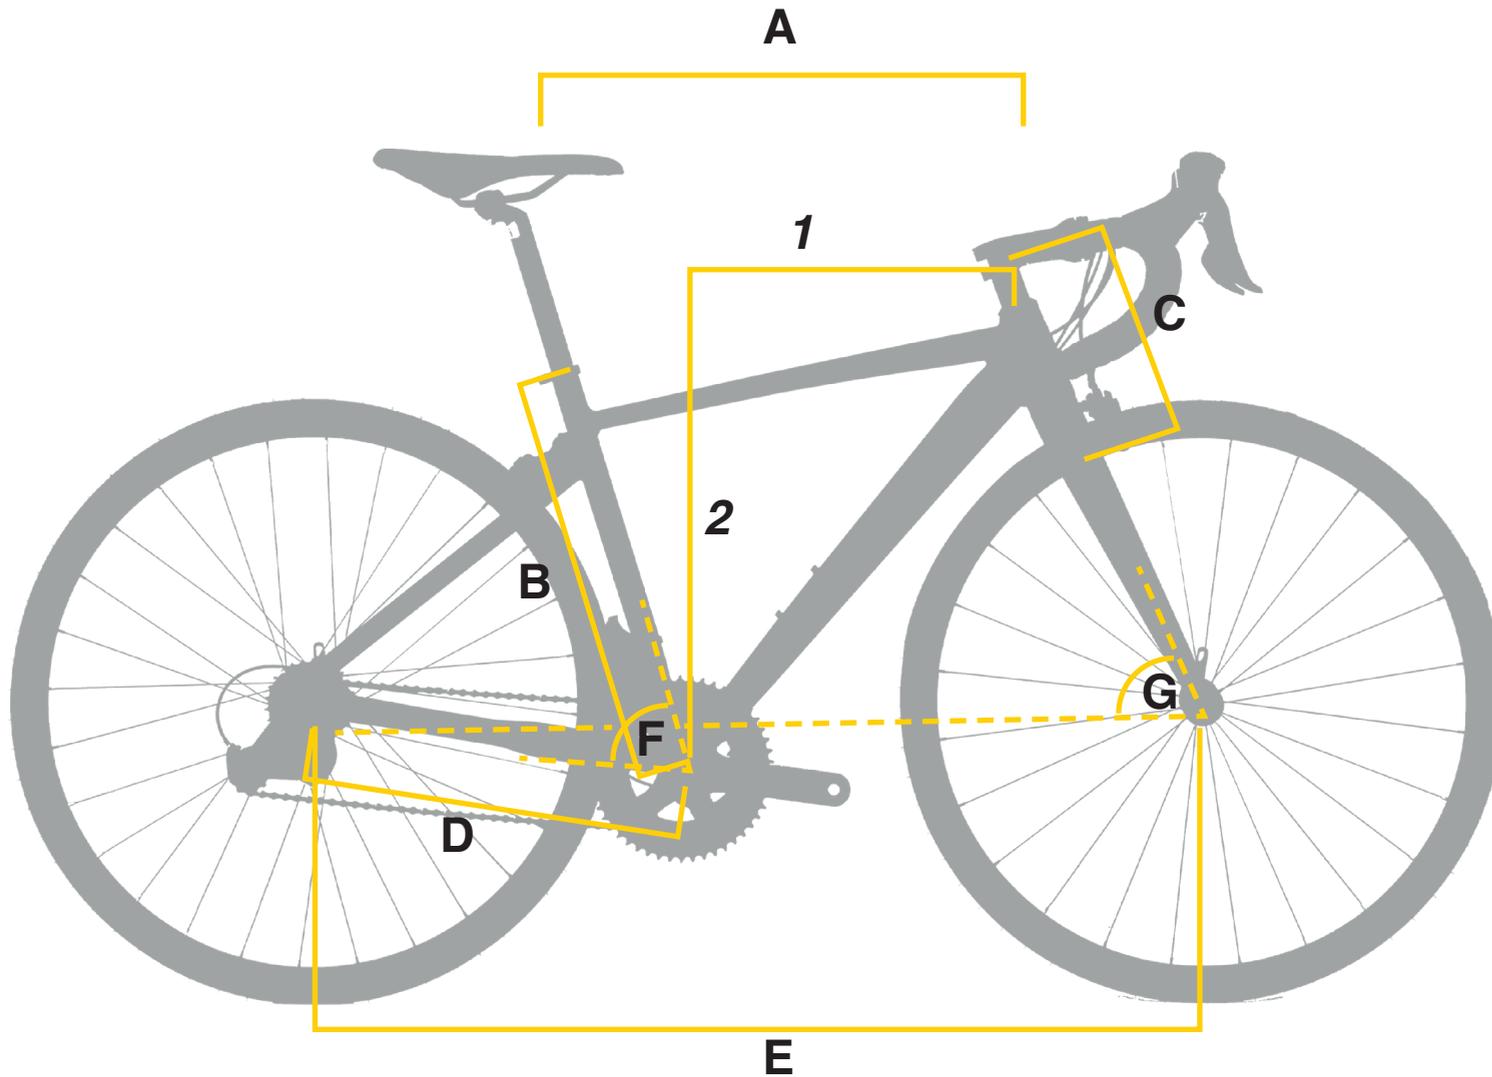

		XS	S	M	L
1	REACH	375	382	393	403
2	STACK	499	504	515	525
A	EFFECTIVE TOP TUBE	515	535	549	560
B	SEAT TUBE LENGHT	430	460	490	520
C	HEAD TUBE LENGHT	110	110	120	120
D	CHAINSTAY LENGHT	415	415	415	415
E	WHEELBASE	983	988	993	998
F	SEAT ANGLE	74	73,5	73	73
G	HEAD ANGLE	70	71	72	72,5